

HYDRONIC MODEL AVAILABLE
Please see page 85

ELECTRIC COLUMN


The classic good looks of the electric COLUMN will add an elegant style to any project. An electric version of the popular hydronic model, the COLUMN is suitable for both domestic and commercial projects. The electric COLUMN is the world's first full laser radiator, meaning there are no joints. It is also perfect for projects that are off-gas or have no central heating pipes installed.

ELECTRIC COLUMN
HORIZONTAL



ELECTRIC COLUMN
VERTICAL

DIMENSIONS

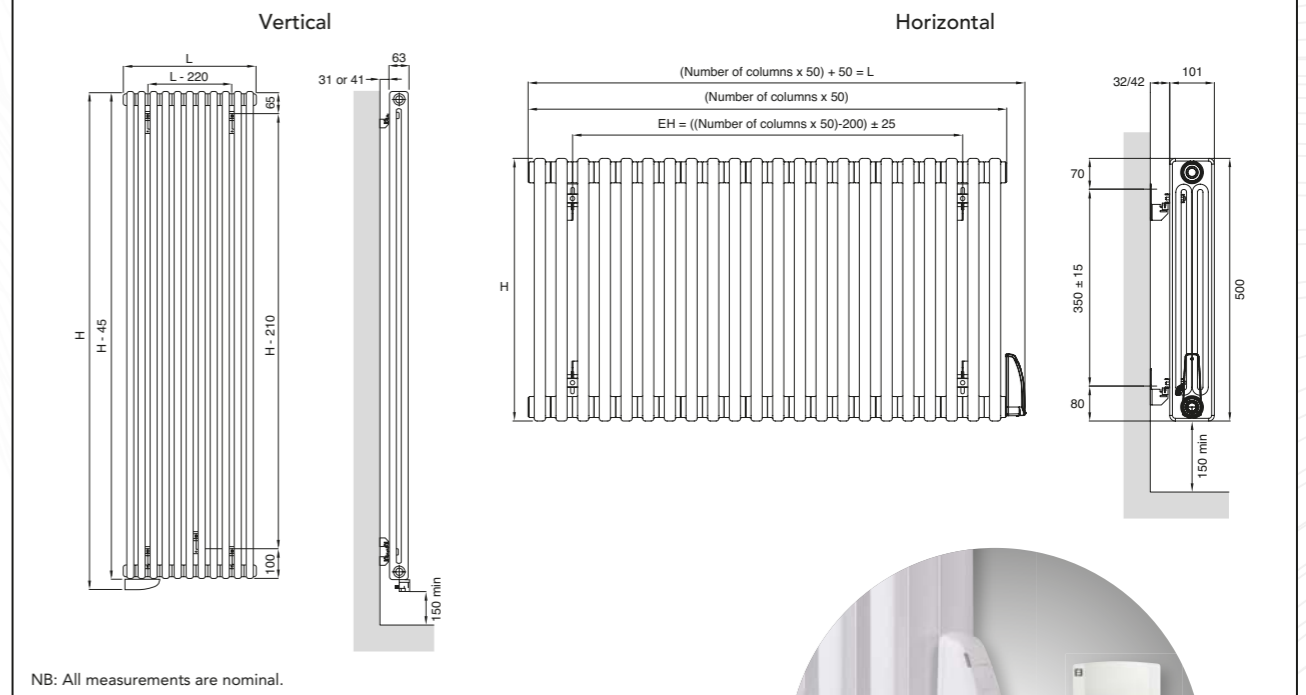

GENERAL SPECIFICATION

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
 - GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
 - COLOUR**
Finished in white (RAL 9016).
 - MATERIAL**
Manufactured from 1.25mm steel. Filled with a glycol mix, part water/part anti-freeze.
 - ACCESSORIES**
TOUCH4 - 4 zone touch screen programmer. Please see page 271.
 - SEALED ELECTRIC**
 - IP RATING**
IP44.
 - DELIVERY**
2 - 5 working days.
 - WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 277.
 - ECO DESIGN DIRECTIVE**
Conforms to the standards (EU) 2015/1188.
- For more general information, please see page 276.

ACCESSORIES	
Product	Order Code
Towel Rail (white with chrome fixings)	12SECRAL [▲]
Micro Fibre Cleaning Brush	COLUMNBRUSH2
Remote Control Thermostat (supplied)	ELECTHERMO (for replacements)
TOUCH4* - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 271



*Please refer to our website for wiring diagram.
[▲] Towel rail only available for products with this symbol.

ELECTRIC COLUMN VERTICAL

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Weight (kg)	Rated Watts
E8SEC2180	1845	400	34.87	1000
E12SEC2180 [▲]	1845	600	51.89	1500

ELECTRIC COLUMN HORIZONTAL

E8SEC3060	600	450	20.42	500
E10SEC3060	600	550	24.01	750
E12SEC3060 [▲]	600	650	28.80	1000
E14SEC3060	600	750	33.86	1250