




## REMOTE THERMOSTATS

The MYSON remote sensor incorporates a traditional TRV head which can be set to the desired temperature.

The room temperature is monitored via a 2, or 5 metre capillary connected to the sensing element which can be mounted in a convenient and temperature representative area of the room. Remote sensor heads are ideal for use when it is difficult for a traditional TRV to operate, such as behind furniture or in direct sunlight, and are primarily used with LST radiators.



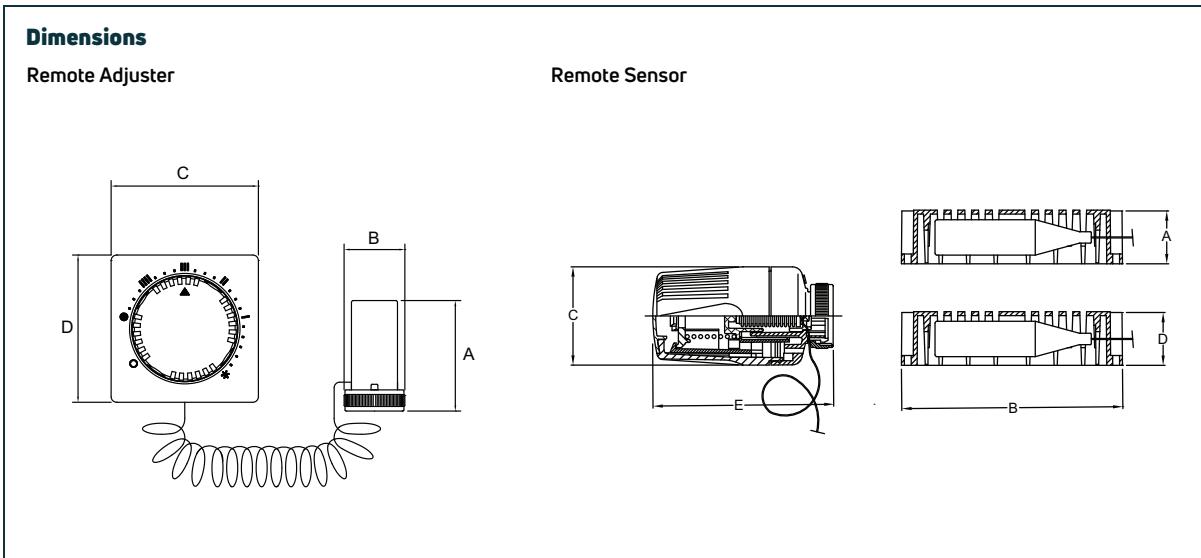

Model	A	B	C	D	E
	(mm)	(mm)	(mm)	(mm)	(mm)
<b>REMOTE ADJUSTER</b>					
2/5m Capillary	53.5	32.5	80.0	80.0	-
<b>REMOTE SENSOR</b>					
2/5m Capillary	28.0	112.0	50.0	28.0	90.0

NB: All measurements are nominal.

## General specification

- 
**CERTIFICATION**  
 Produced under a quality management system - ISO 9001:2008.
- 
**GUARANTEE**  
 2 year guarantee from date of purchase against manufacturing defects.
- 
**DELIVERY**  
 2 - 5 working days.

For more general information, please see page 254.



Description	Colour (Top)	Order Code	Minimum Order Qty
Remote Adjustable Head - 2m*	White	REMADJHEAD2	1
Remote Adjustable Head - 5m*	White	REMADJHEAD5	1
Remote Sensor Head - 2m*	White	REMSSENHEAD2	1
Remote Sensor Head - 5m*	White	REMSSENHEAD5	1

\*Temporarily unavailable.